



Variable Optical Attenuator

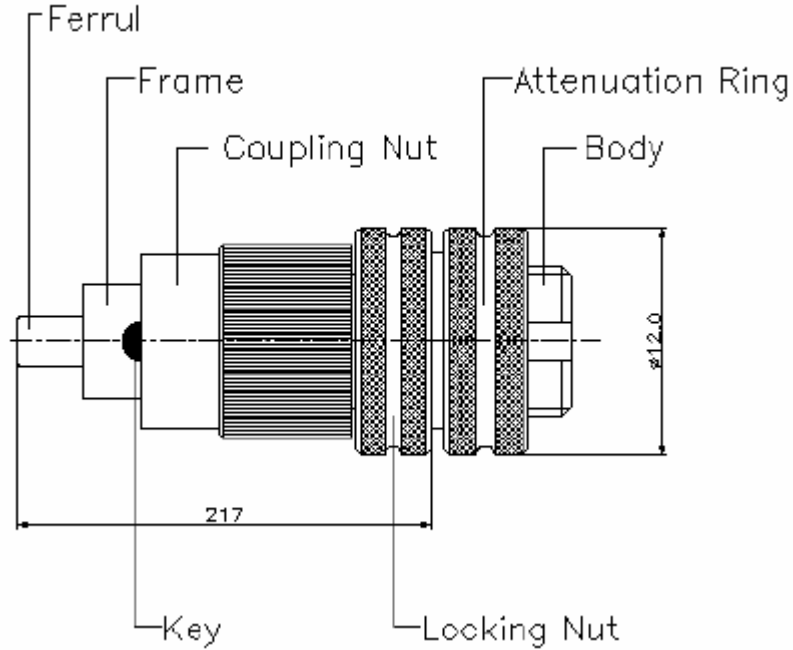

Performance

Variable Attenuator(Air-Gap:UPC-APC)

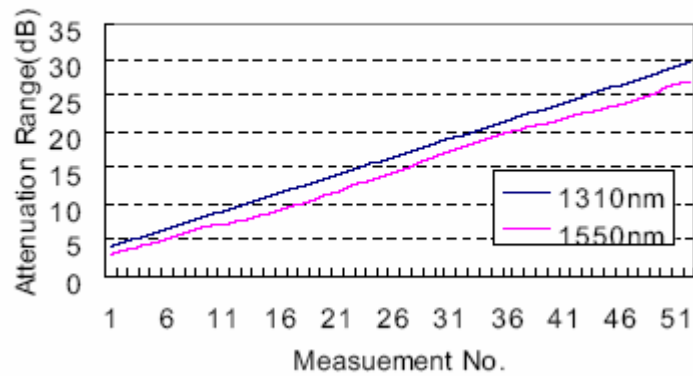

Specifications

Optical Performance

Type	N	A	S
Composition	UPC-UPC	UPC-APC	APC-APC
Attenuation Variable Range	28dB	24dB	28dB
Minimum Attenuation Value	1dB	4dB	1dB
Return Loss	13dB	35dB~50dB	>60dB
Resolution	0.5dB		
Operation Temperature	-15°C~60°C		
Storage Temperature	-40°C~70°C		

Parts and material

No.	Parts Name	Q'ty	Material	Notes
1	Ferrule	1	Zirconia	
2	Frame	1	Brass+Ni	
3	Key	1	Brass	
4	Coupling Nut	1	Brass+Ni	
5	Locking Nut	1	Brass+Ni	
6	Attenuation Ring	1	Brass+Ni	

FibreFab Limited

Witan Court
305 Upper Fourth Street
Central Milton Keynes
MK9 1EH

Tel: +44 (0) 870 127 3330
Fax: +44 (0) 870 127 3331
Email: sales@fibrefab.com
Internet: www.fibrefab.com